





JANENO ELECTRICAL APPLIANCE FACTORY


Address: No.2 Gaofan Road, Xiaodong Industrial Park,

Yuyao 315408, Zhejiang Prov., China

Tel: (86)574-62598622
Fax: (86)574-62598633
Http://www.cn-janeno.com
E-mail: Janeno@cn-janeno.com

2020

JANENO ELECTRICAL APPLIANCE FACTORY

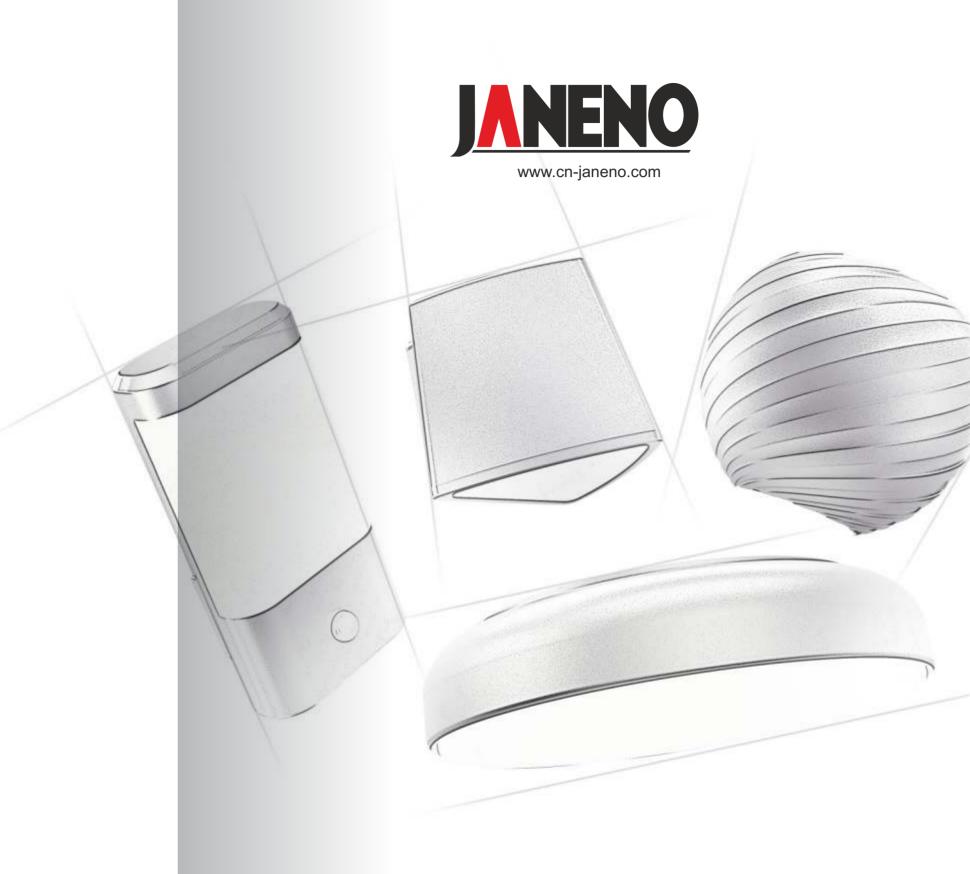











JANENO ELECTRICAL APPLIANCE FACTORY

Address: No.2 Gaofan Road, Xiaodong Industrial Park,

Yuyao 315408, Zhejiang Prov., China

Tel: (86)574-62598622 Fax: (86)574-62598633 Http://www.cn-janeno.com E-mail: Janeno@cn-janeno.com 2020

JANENO ELECTRICAL APPLIANCE FACTORY





Enterprise Introduction

JANENO lighting conveniently located in the east part of China, next to the port of Ningbo and just 3 hours from Shanghai and 1.5 h from Hangzhou. JANENO lighting is one of China's leading horizontal integrated manufacturer of premium outdoor lighting, Our production includes: House tooling, Mould sub-factory, Die-cast sub-factory, Power-coating workshop, Assembly workshop, LED workshop. We pay attention to details and to high quality standards of excellence, such as: UL and Energy Star, CE, ISO 9001, ISO14001, UL, ETL, BSCI, ERP and so on. Under the principle of "Being innovative, Being excel lent", our company dour professional and international team of designers and engineers. We try our best to provide good quality, competitive prices and excellent services for customers from all over the world. Welcome to JANENO lighting to get best service, support and professional advice from us.



































































MATERIALS

Aluminum housing with PC Diffuser

LIGHT DATA


LED with High quality power supply unit for outdoor IP54

CCT: 3000K, 4000K, 6000K

COLOUR

Dark Grey, Grey, Black, White

Model	JW1902
Wattage	12W
Lumen	1000
IP	54
Dimensions(mm) L×W×H	160×130×130

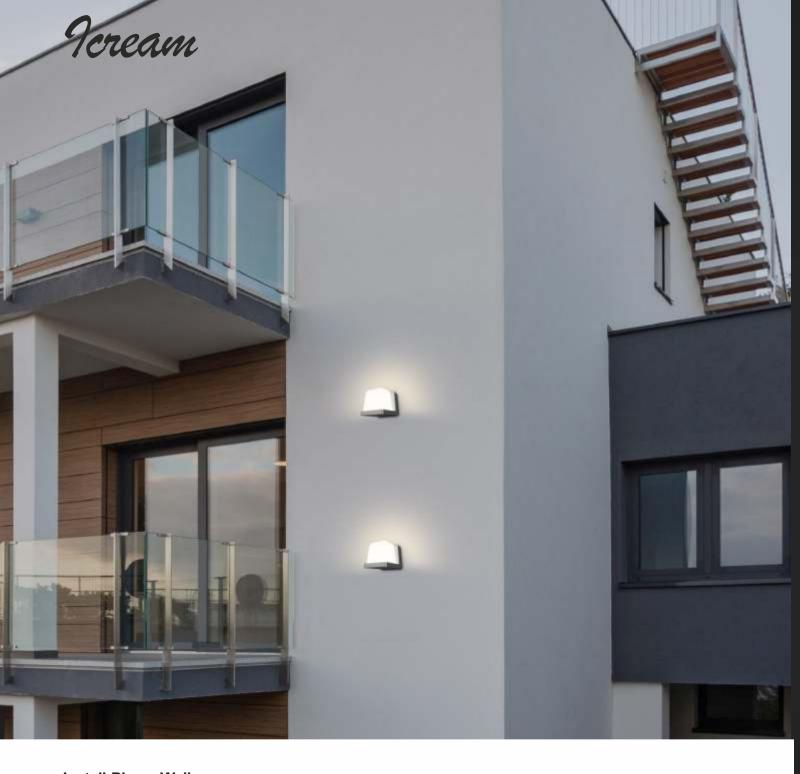

- 1. Patent and Simple Special design for LED lighting, with durable die-casting aluminum housing.
- 2. High quality SMD Chips, CRI is much greater than 80, generate soft and warm brightness.
- 3. High-quality PC shade, resistence to UV.
- 4. Isolated constant current driver, PF>0.9, IP54.
- 5. Standard or high efficiency output lumen for option, CCT 3000K, 4000K, 6000K.
- 6. Energy saving, environmental friendly is our pursue and we devote our mind to the globe customers.























- 1. Patent and Simple Special design for LED lighting, with durable die-casting aluminum housing.
- 2. High quality SMD Chips, CRI is much greater than 80, generate soft and warm brightness.
- 3. High-quality Tempered glass for weatherproof.
- 4. Isolated constant current driver, PF>0.9, IP65.
- 5. Standard or high efficiency output lumen for option, CCT 3000K, 4000K, 6000K.
- 6. Energy saving, environmental friendly is our pursue and we devote our mind to the globe customers.




















MATERIALS

Aluminum housing with tempered glass

LIGHT DATA


LED with High quality power supply unit for outdoor IP65

CCT: 3000K, 4000K, 6000K

COLOUR

Model	JW1903
Wattage	7W
Lumen	500
IP	65
Dimensions(mm) L×W×H	106×80×180











Aluminum housing with glass

LIGHT DATA


LED with High quality power supply unit for outdoor IP65

CCT: 3000K, 4000K, 6000K

COLOUR

Dark Grey, Grey, Black, White

Model	JW1904
Wattage	12W
Lumen	1000
IP	65
Dimensions(mm) L×W×H	75×100×150

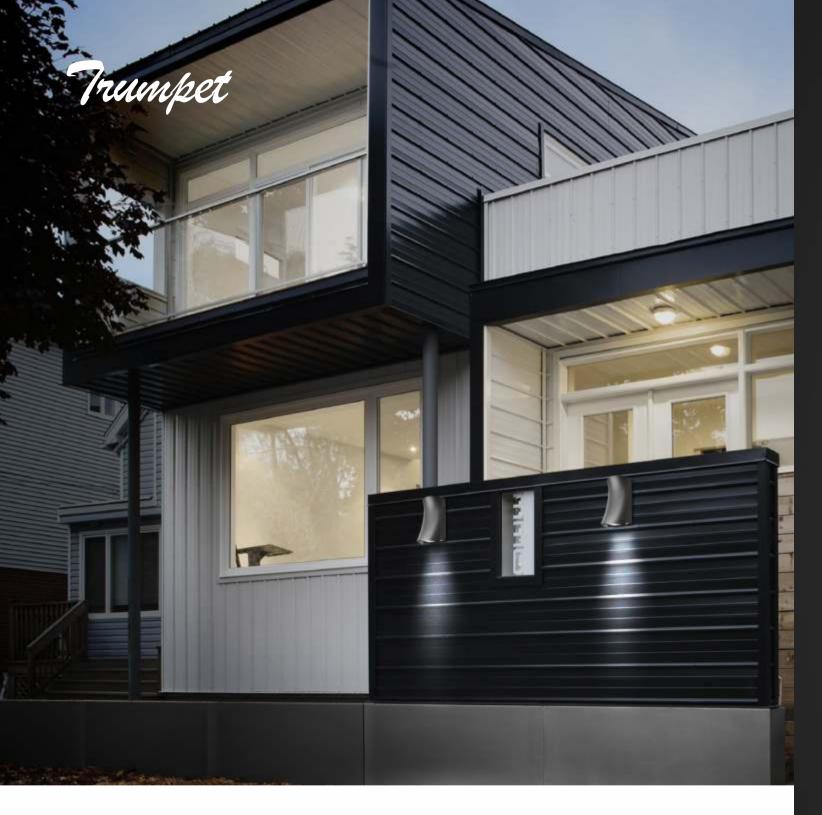

- 1. Patent and Simple Special design for LED lighting, with durable die-casting aluminum housing.
- 2. High quality SMD Chips, CRI is much greater than 80, generate soft and warm brightness.
- 3. High-quality Tempered glass for weatherproof.
- 4. Isolated constant current driver, PF>0.9, IP65.
- 5. Standard or high efficiency output lumen for option, CCT 3000K, 4000K, 6000K.
- 6. Energy saving, environmental friendly is our pursue and we devote our mind to the globe customers.























Aluminum housing with Acrylic sheet

LIGHT DATA

LED with High quality power supply unit for outdoor


IP65

CCT: 3000K, 4000K, 6000K

COLOUR

Dark Grey, Grey, Black, White

Model	JW1905
Wattage	10W
Lumen	800
IP	65
Dimensions(mm) L×W×H	35×150×108

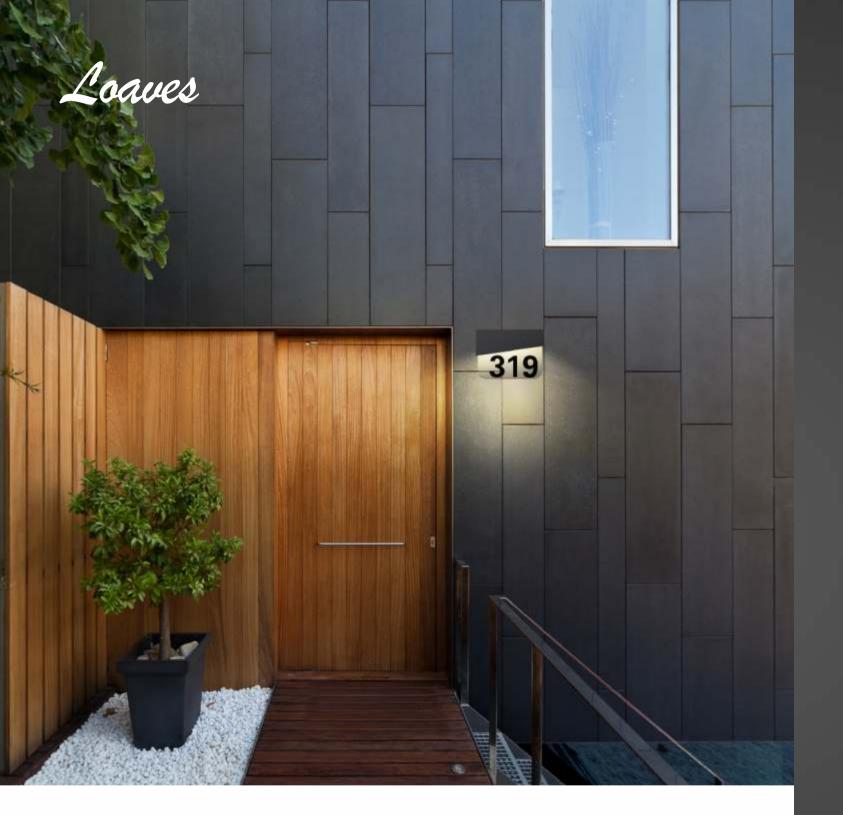

- 1. Patent and Simple Special design for LED lighting, with durable die-casting aluminum housing.
- 2. High quality SMD Chips, CRI is much greater than 80, generate soft and warm brightness.
- 3. High-quality Tempered glass for weatherproof.
- 4. Isolated constant current driver, PF>0.9, IP65.
- 5. Standard or high efficiency output lumen for option, CCT 3000K, 4000K, 6000K.
- 6. Energy saving, environmental friendly is our pursue and we devote our mind to the globe customers.
























Aluminum housing with Tempered glass

LIGHT DATA


LED with High quality power supply unit for outdoor IP65

CCT: 3000K, 4000K, 6000K

COLOUR

Dark Grey, Grey, Black, White

Model	JW1906A	JW1906B
Wattage	MAX 35W	7VV
Lumen		550
IP	65	65
Dimensions(mm) L×W×H	123×115×105	123×115×105

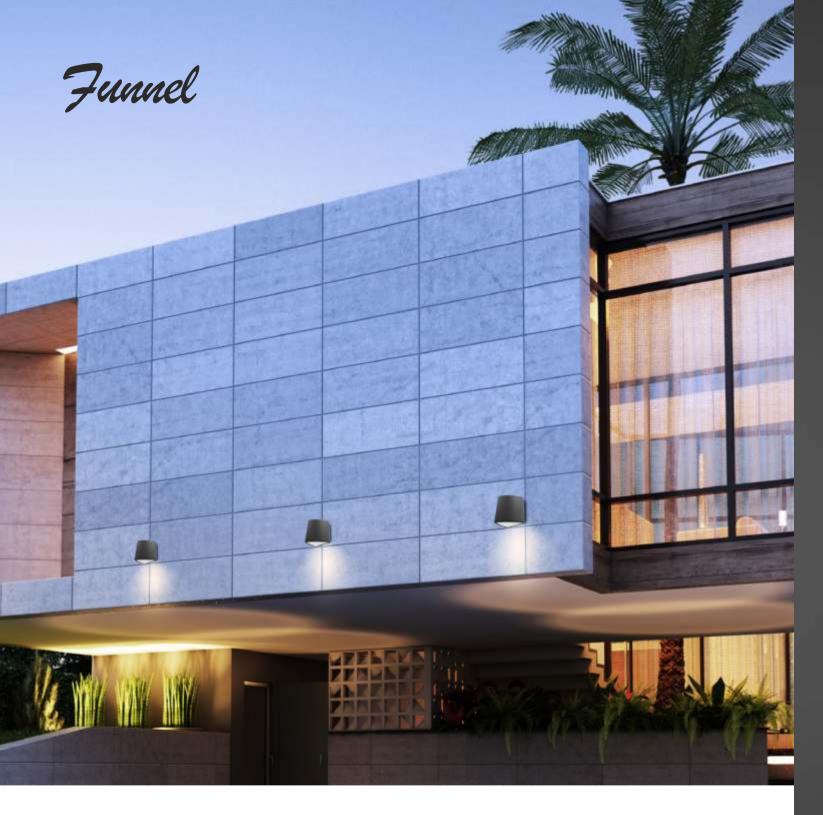

- 1. Patent and Simple Special design for LED lighting, with durable die-casting aluminum housing.
- 2. High quality SMD Chips, CRI is much greater than 80, generate soft and warm brightness.
- 3. High-quality Tempered glass for weatherproof.
- 4. Isolated constant current driver, PF>0.9, IP65.
- 5. Standard or high efficiency output lumen for option, CCT 3000K, 4000K, 6000K.
- 6. Energy saving, environmental friendly is our pursue and we devote our mind to the globe customers.











Install Place: Wall

- 1. Patent and Simple Special design for LED lighting, with durable die-casting aluminum housing.
- 2. High quality SMD Chips, CRI is much greater than 80, generate soft and warm brightness.
- 3. High-quality Tempered glass for weatherproof.
- 4. Isolated constant current driver, PF>0.9, IP65.
- 5. Standard or high efficiency output lumen for option, CCT 3000K, 4000K, 6000K.
- 6. Energy saving, environmental friendly is our pursue and we devote our mind to the globe customers.






















MATERIALS

Aluminum housing with Tempered glass

LIGHT DATA

LED with High quality power supply unit for outdoor IP65

CCT: 3000K, 4000K, 6000K


COLOUR

Model	JW1907
Wattage	7W
Lumen	550
IP	65
Dimensions(mm) L×W×H	70×113×90









MATERIALS

Aluminum housing with PC Diffuser

LIGHT DATA

LED with High quality power supply unit for outdoor IP65

CCT: 3000K, 4000K, 6000K

COLOUR

Dark Grey, Grey, Black, White

Model	JW1908
Wattage	12W
Lumen	1000
IP	65
Dimensions(mm) L×W×H	60×150×66



- 1. Patent and Simple Special design for LED lighting, with durable die-casting aluminum housing.
- 2. High quality SMD Chips, CRI is much greater than 80, generate soft and warm brightness.
- 3. High-quality Tempered glass for weatherproof.
- 4. Isolated constant current driver, PF>0.9, IP65.
- 5. Standard or high efficiency output lumen for option, CCT 3000K, 4000K, 6000K.
- 6. Energy saving, environmental friendly is our pursue and we devote our mind to the globe customers.

























Aluminum housing with PC Diffuser

LIGHT DATA


LED with High quality power supply unit for outdoor IP65

CCT: 3000K, 4000K, 6000K

COLOUR

Dark Grey, Grey, Black, White

Model	JW1909
Wattage	12W
Lumen	1000
IP	65
Dimensions(mm) L×W×H	45×118×145

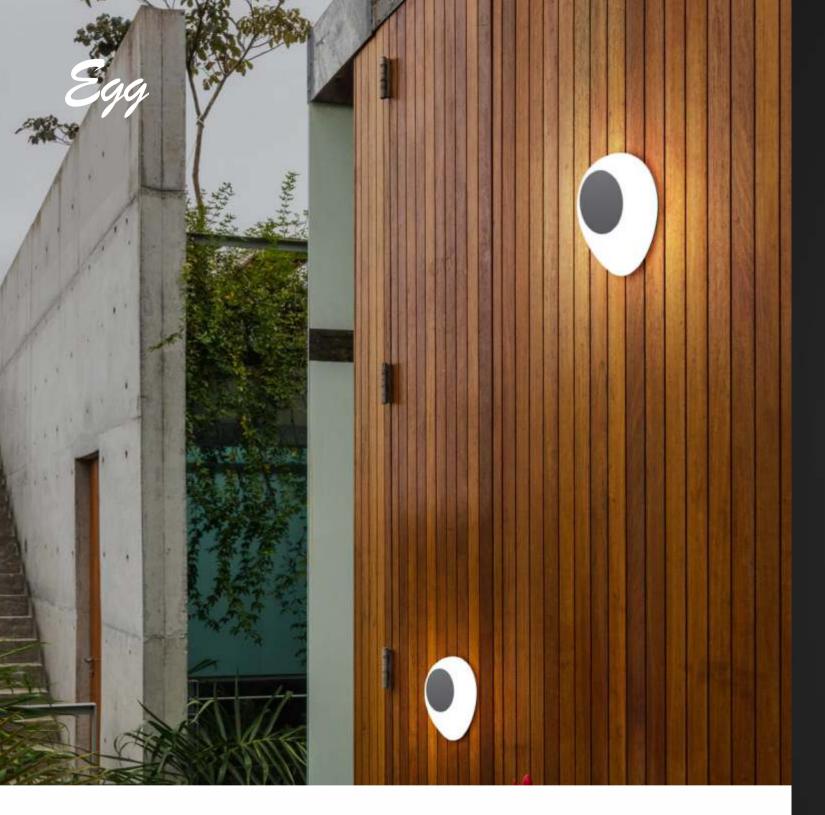

- 1. Patent and Simple Special design for LED lighting, with durable die-casting aluminum housing.
- 2. High quality SMD Chips, CRI is much greater than 80, generate soft and warm brightness.
- 3. High-quality Tempered glass for weatherproof.
- 4. Isolated constant current driver, PF>0.9, IP65.
- 5. Standard or high efficiency output lumen for option, CCT 3000K, 4000K, 6000K.
- 6. Energy saving, environmental friendly is our pursue and we devote our mind to the globe customers.























Aluminum housing with Tempered glass

LIGHT DATA

LED with High quality power supply unit for outdoor IP65

CCT: 3000K, 4000K, 6000K

COLOUR

Model	JW1910
Wattage	6W
Lumen	550
IP	65
Dimensions(mm) L×W×H	65×90×127



- 1. Patent and Simple Special design for LED lighting, with durable die-casting aluminum housing.
- 2. High quality SMD Chips, CRI is much greater than 80, generate soft and warm brightness.
- 3. High-quality Tempered glass for weatherproof.
- 4. Isolated constant current driver, PF>0.9, IP65.
- 5. Standard or high efficiency output lumen for option, CCT 3000K, 4000K, 6000K.
- 6. Energy saving, environmental friendly is our pursue and we devote our mind to the globe customers.






















Aluminum housing with Tempered glass

LIGHT DATA

LED with High quality power supply unit for outdoor IP65

CCT: 3000K, 4000K, 6000K

COLOUR

Dark Grey, Grey, Black, White

Model	JW1911A	JW1911B
Wattage	MAX 20W	6W
Lumen		500
IP	65	65
Dimensions(mm) L×W×H	120×80×158	120×80×158



- 1. Patent and Simple Special design for LED lighting, with durable die-casting aluminum housing.
- 2. High quality SMD Chips, CRI is much greater than 80, generate soft and warm brightness.
- 3. High-quality Tempered glass for weatherproof.
- 4. Isolated constant current driver, PF>0.9, IP65.
- 5. Standard or high efficiency output lumen for option, CCT 3000K, 4000K, 6000K.
- 6. Energy saving, environmental friendly is our pursue and we devote our mind to the globe customers.




































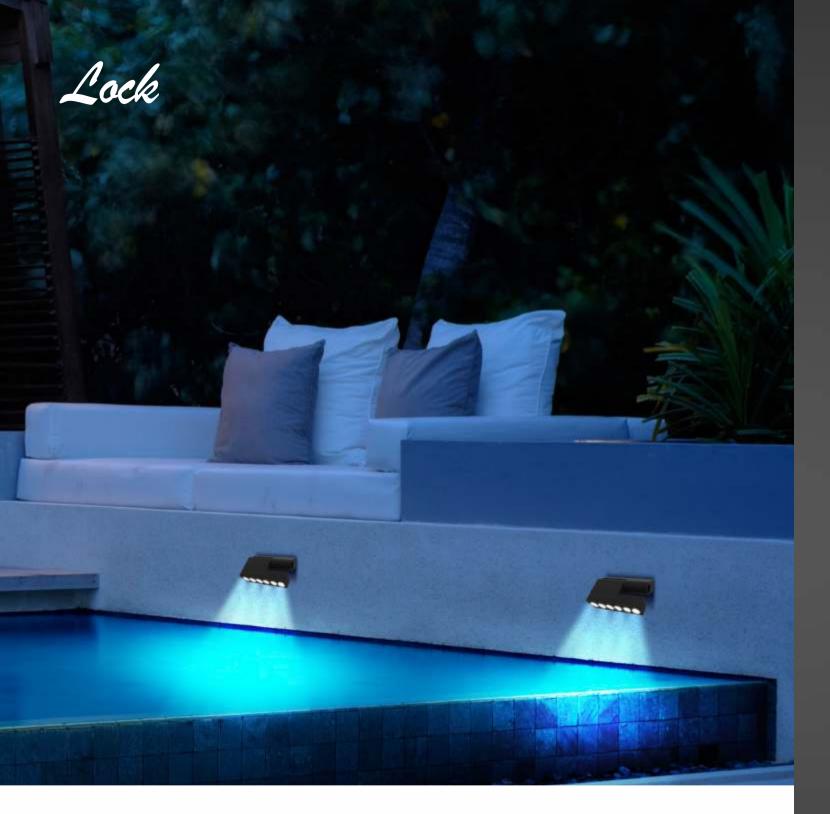

Install Place: Wall

- 1. Patent and Simple Special design for LED lighting, with durable die-casting aluminum housing.
- 2. High quality SMD Chips, CRI is much greater than 80, generate soft and warm brightness.
- 3. High-quality Tempered glass for weatherproof.
- 4. Isolated constant current driver, PF>0.9, IP65.
- 5. Standard or high efficiency output lumen for option, CCT 3000K, 4000K, 6000K.
- 6. Energy saving, environmental friendly is our pursue and we devote our mind to the globe customers.



















MATERIALS

Aluminum housing with PC Diffuser

LIGHT DATA


LED with High quality power supply unit for outdoor IP65


CCT: 3000K, 4000K, 6000K

COLOUR

Model	JW1912
Wattage	6W
Lumen	500
IP	65
Dimensions(mm) L×W×H	120×150×40







Aluminum housing with PC Diffuser

LIGHT DATA

LED with High quality power supply unit for outdoor IP65

CCT: 3000K, 4000K, 6000K

COLOUR

Dark Grey, Grey, Black, White

Model	JW1915
Wattage	12W
Lumen	1000
IP	65
Dimensions(mm) L×W×H	70×135×180



- 1. Patent and Simple Special design for LED lighting, with durable die-casting aluminum housing.
- 2. High quality SMD Chips, CRI is much greater than 80, generate soft and warm brightness.
- 3. High-quality Tempered glass for weatherproof.
- 4. Isolated constant current driver, PF>0.9, IP65.
- 5. Standard or high efficiency output lumen for option, CCT 3000K, 4000K, 6000K.
- 6. Energy saving, environmental friendly is our pursue and we devote our mind to the globe customers.























JN586E-PIR





Aluminum housing with PC Diffuser

LIGHT DATA


E27 max 60W/LED 10W without bulb


for outdoor IP54

CCT: 2700K-6500K

COLOUR

Dark Grey, Grey, Black, White





Model	JN586	JN586E	JN586-PIR	JN586E-PIR	
Wattage	E27 max.60W	10W	E27 max.60W	10W	
Lumen	/	800	/	800	
IP	54	54	54	54	
Dimensions(mm) L×W×H	218×178×260	218×178×260	218×178×265	218×178×265	



- 1. Patent and Simple Special design for LED lighting, with durable die-casting aluminum housing.
- 2. High quality SMD Chips, CRI is much greater than 80, generate soft and warm brightness.
- 3. High-quality PC shade, resistence to UV.
- 4. Isolated constant current driver, PF>0.9, IP65.
- 5. Standard or high efficiency output lumen for option, CCT 2700-6500K.
- 6. Energy saving, environmental friendly is our pursue and we devote our mind to the globe customers.

























Aluminum housing with PC Diffuser


LIGHT DATA

E27 max 18W without bulb for outdoor

CCT: 3000K, 4000K, 6000K


COLOUR

Dark Grey, Grey, Black, White

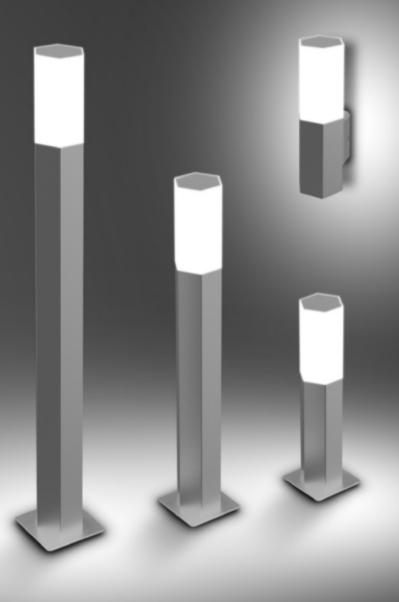

Model	JC1923W	JC1923S	JC1923M	JC1923L
Wattage	E27 max 18W	E27 max 18W	E27 max 18W	E27 max 18W
IP	54	54	54	54
Dimensions(mm) L×W×H	100×70×230	85×85×300	85×85×500	85×85×700

14

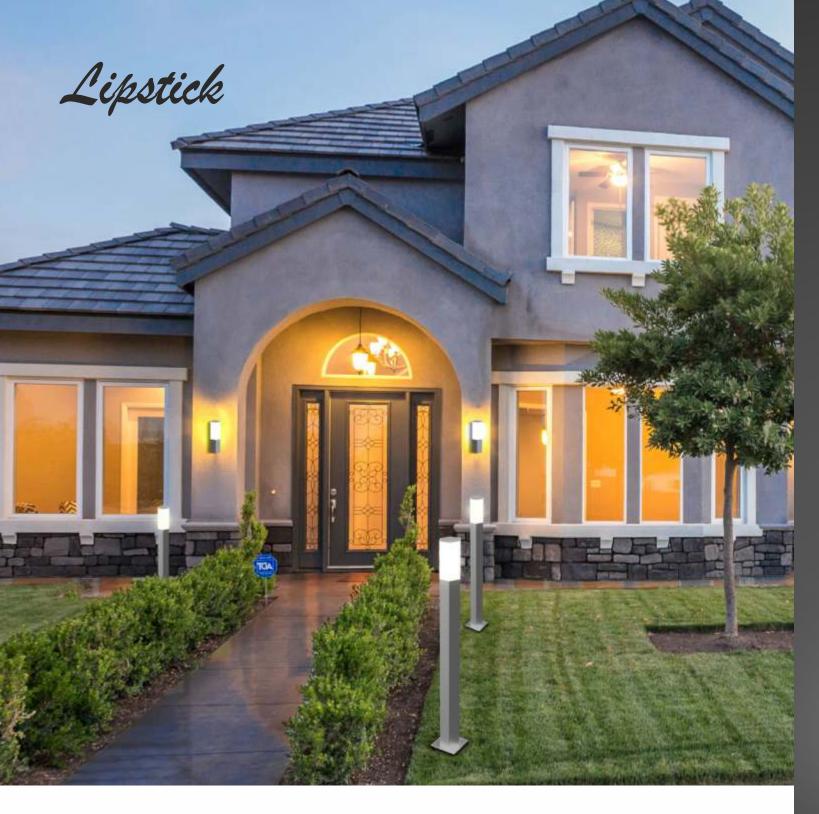

Install Place: Garden, Park, Grass etc.

- 1. Patent and Simple Special design for LED lighting, with durable die-casting aluminum housing.
- 2. High quality SMD Chips, CRI is much greater than 80, generate soft and warm brightness.
- 3. High-quality PC shade,resistence to UV.
- 4. Isolated constant current driver, PF>0.9, IP54.
- 5. Standard or high efficiency output lumen for option, CCT 3000K, 4000K, 6000K.
- 6. Energy saving, environmental friendly is our pursue and we devote our mind to the globe customers.

























Aluminum housing with PC Diffuser

LIGHT DATA


E27 max 18W without bulb for outdoor

IP54

CCT: 3000K, 4000K, 6000K

COLOUR

Dark Grey, Grey, Black, White

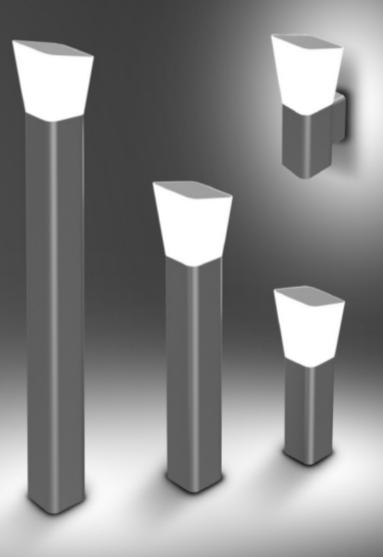

Install Place: Garden, Park, Grass etc.

- 1. Patent and Simple Special design for LED lighting, with durable die-casting aluminum housing.
- 2. High quality SMD Chips, CRI is much greater than 80, generate soft and warm brightness.
- 3. High-quality PC shade, resistence to UV.
- 4. Isolated constant current driver, PF>0.9, IP54.
- 5. Standard or high efficiency output lumen for option, CCT 3000K, 4000K, 6000K.
- 6. Energy saving, environmental friendly is our pursue and we devote our mind to the globe customers.


























MATERIALS

Aluminum housing with PC Diffuser

LIGHT DATA

LED with High quality power supply unit for outdoor

CCT: 2700K-6500K

COLOUR

Dark Grey, Grey, Black, White

Model	JN587/587-PIR	JN587A	JN587B	JN587S	JN587M	JN587L
Wattage	Gu10 max 1x35W	COB 5W	6W	G	u10 max 1x3	5W
IP	54	54	54		54	
Dimensions(mm)	134×163×108	134×163×108	134×163×108	108×300	108×450	108×700



Install Place: Garden, Park, Grass etc.

- 1. Patent and Simple Special design for LED lighting, with durable die-casting aluminum housing.
- 2. High quality SMD Chips, CRI is much greater than 80, generate soft and warm brightness.
- 3. High-quality PC shade, resistence to UV.
- 4. Isolated constant current driver, PF>0.9, IP65.
- 5. Standard or high efficiency output lumen for option, CCT 2700-6500K.
- 6. Energy saving, environmental friendly is our pursue and we devote our mind to the globe customers.





















